


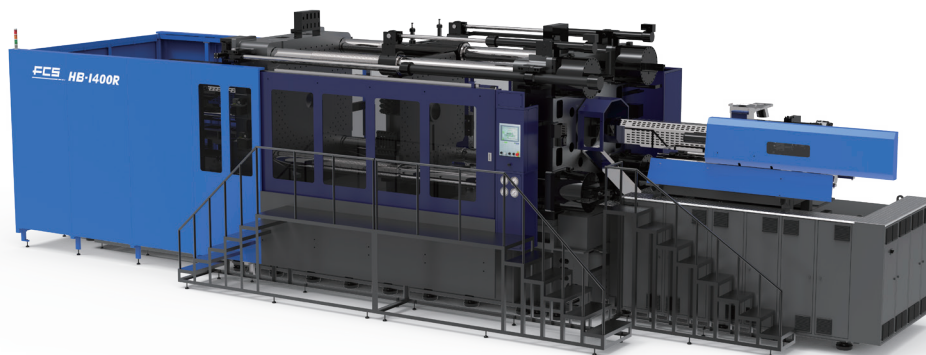

دستگاه تزریق پلاستیک چند جزئی با میز افقی گردان

Large Horizontal Rotary Table Multi-Component Injection Molding Machine

واحد تزریق	Injection unit	UNIT	HB-350R		HB-550R		HB-900R		HB-1400R		HB-1900R		HB-2400R		HB-3500R		
نوع مارییج	Screw type	-	A	B	A	B	A	B	A	B	A	B	A	B	A	B	
نوع	Type	-	1600	1600	2200	1600	4600	1600	5900	1600	5900	1600	10300	7000	10300	7000	
قطر مارییج	Screw diameter	mm	54	54	62	54	75	54	85	54	85	54	110	95	110	95	
کورس مارییج	Screw stroke	mm	280	280	306	280	420	280	430	280	430	280	540	450	540	450	
حجم تزریق (تئوریک)	Theoretical shot volume	cm³	641	641	923	641	1855	641	2439	641	2439	641	5129	3188	5129	3188	
وزن تزریق	Shot weight of injection (PS)	gram	583	583	840	583	1688	583	2219	583	2219	583	4668	2901	4668	2901	
فشار تزریق	Injection pressure	kgf/cm²	2497	2497	2387	2497	2466	2497	2445	2497	2445	2497	2008	2199	2008	2199	
سرعت تزریق	Injection speed	mm/sec	94	94	93	94	89	94	87	94	87	94	106	120	115	120	
حجم تزریق	Injection rate	g/s	196	196	256	196	357	196	449	196	449	196	916	774	994	774	
واحد گیره																	
Mold clamping unit																	
قدرت قفل گیره	Mold clamping force	tonf	350		550		900		1400		1900		2400		3500		
کورس گیره متحرک	Mold clamping stroke	mm	1600		1600		2400		3650		4000		4200		4950		
حداقل و حداکثر ارتفاع قالب	Mould Thickness	mm	400~600	400~600	600~750	600~750	600~1000	600~1000	600~1600	600~1600	650~1650	650~1650	800~1800	800~1800	950~2050	950~2050	
میزان بازشدن گیره	Daylight	mm	2550		3000		3800		5100		5600		6100		7200		
کوچک ترین قالب پیشنهادی	Suggested min mold dim (HxV)	mm	480x480		640x570		790x790		1090x950		1260x1090		1400x1200		1610x1330		
فاصله بین میله های راهنما	Tie bar spacing (H × V)	mm	680x680		910x810		1120x1120		1550x1350		1800x1550		2000x1700		2300x1900		
ابعاد گیره	Mold platen (H × V)	mm	1030x1030		1380x1280		1650x1650		2200x2010		2600x2340		2840x2540		3350x2950		
صفحه گردان	Revolve platen	mm	700x660		1200x790		1300x1370		1800x1770		2115x1925		2500x2165		3100x2450		
بیشترین قطر قالب گردان	Maximum rotation diameter	mm	ø1120		ø1760		ø1780		ø2360		ø2670		ø3100		ø3700		
واحد قدرت																	
Electrical equipment																	
حداکثر قدرت الکترو موتور	Max. pump driving motor	kW(380V)	36.7	36.7	65.0	65.0	81.7	81.7	90.0	90.0	135.0	135.0	156.0	156.0	225.0	225.0	
قدرت الکترو موتور	Pump driving motor	HP(kW)	10(7.5)		10(7.5)		20(15.0)		20(15.0)		20(15.0)		20(15.0)		20(15.0)		
کنترل کننده دما	Temperature controller	set	6	6	6	6	8	6	8	6	8	6	8	6	8	6	
توان مصرفی هیتر ها	Heater capacity	kW	19.92	19.92	23.28	19.92	37.55	19.92	43.77	19.92	43.77	19.92	63.4	46.3	63.4	46.3	
مشخصات کلی																	
Others																	
ابعاد دستگاه	Machine dimensions (L × W × H)	mm	11000x3000x2200			13450x3650x2700			13950x3650x3500			16200x4000x4000			17900x4300x4100		
ظرفیت مخزن روغن هیدرولیک	Oil tank capacity	liter	600	600	1200	1200	1200	1200	1350	1350	2100	1700	2100	1700	2900	2300	
وزن دستگاه	Machine weight	ton	25			35			70			140			180		
حداکثر فشار سیستم	Max. system pressure	kgf/cm²	140			140			140			140			175		